

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

RCA 89762

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

10/069200

INTERNATIONAL APPLICATION NO.

PCT/US00/26062

INTERNATIONAL FILING DATE

22 September 2000 (22.09.00)

PRIORITY DATE CLAIMED

22 September 1999 (22.09.99)

TITLE OF INVENTION

PLL WITH MEMORY FOR ELECTRONIC ALIGNMENTS

APPLICANT(S) FOR DO/EO/US

Edward Allen Hall and Feroz Kaiki Alpaiwalla

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
- ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
- ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
- ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Return Postcard Receipt**EXPRESS MAIL LABEL EL902321492US****DATE: February 22, 2002**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) 10/069200		INTERNATIONAL APPLICATION NO. PCT/US00/26062		ATTORNEY'S DOCKET NUMBER RCA 89762	
---	--	--	--	--	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :				CALCULATIONS PTO USE ONLY	
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	24 - 20 =	4	x \$18.00	\$72.00	
Independent claims	5 - 3 =	2	x \$84.00	\$168.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,130.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$1,130.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,130.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input checked="" type="checkbox"/>				\$40.00	
TOTAL FEES ENCLOSED =				\$1,170.00	
				Amount to be:	\$
				refunded	
				charged	\$

a. ☐ A check in the amount of _____ to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account No. **07-0832** in the amount of **\$1,170.00** to cover the above fees. A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **07-0832**. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Mr. Joseph S. Tripoli
 Patent Operations
 THOMSON multimedia Licensing Inc.
 PO Box 5312
 Princeton, New Jersey 08540 US


 SIGNATURE
KUNYUKI AKIYAMA
 NAME
43,314
 REGISTRATION NUMBER
February 22, 2002
 DATE

10/069200

PLL WITH MEMORY FOR ELECTRONIC ALIGNMENTS

Field of the Invention

5 The invention generally relates to television receivers, and more particularly, to tuners used in televisions.

Description of the Background Art

10 Television tuners are usually implemented in television devices (such as television receivers, VCR's, etc.) either as discrete tuner modules or as on-board tuner circuits on digital decoder unit chassis ("tuner-on-board"). Both discrete tuner modules and on-board tuner circuits often include phase-locked loop (PLL) circuits.

15 FIG. 1 shows one embodiment of a television control system 100 to be used in a television receiver. The television control system includes a microprocessor 102, a chassis nonvolatile memory 104, a communication bus 106, a tuner module 108 such as a single-conversion tuner, and an RF source 110 such as an antenna or cable wire. The tuner module 108 comprises a PLL integrated circuit 112 of the tuner module. The communication bus 106
20 electronically connects the microprocessor 102 to the PLL integrated circuit 112. The microprocessor 102 is electrically connected to the chassis nonvolatile memory 104.

25 The manufacture of tuners for television receivers includes an alignment process for adjusting the tuners to perform fairly equal over the entire frequency band of operation. Presently, there are two general methods for aligning a television tuner: mechanical alignment and electronic alignment. Mechanical alignment involves slight changes in the location of sensitive components in the tuner (e.g. coils and the like) that maximize the performance of the tuner. Mechanical alignment is generally accomplished via human interaction at the end
30 of the production line, and as such is generally inefficient.

35 Electronic alignment is a process whereby alignment data for a particular tuner is stored in non-volatile memory contained in the television receiver. When the user selects a desired channel, a microprocessor within the television receiver looks up the alignment data stored in the non-volatile memory for the desired channel and communicates this alignment data to the television tuner. The tuner then compensates for mismatches and keeps tuning performance constant. The D/A converter circuits are provided in the tuners to electronically "align" the tuners to provide optimum frequency adjustment (i.e. "trimming") of the tuners

by converting the digitally stored alignment data to analog voltages that align circuits.

While electronic alignment reduces human interaction on the production line, it narrows compatibility among the television receiver components. The microprocessor must contain specific routines for selecting and communicating the alignment data from the non-volatile memory to the tuner. The tuner must be adapted to accept the data and compensate for mismatches. As such, replacement of a malfunctioning television tuner in the field requires finding a new television tuner that is adapted to the specific television control system.

When a discrete tuner module (not a tuner-on-board type tuner) is utilized, different data must be provided for the chassis nonvolatile memory, depending upon the specific characteristics of tuner module to be used with a particular chassis. For example, a tuner used in Europe uses different alignment data than a tuner used in the United States. Such alignment data is stored in the chassis nonvolatile memory that interacts with the microprocessor to retrieve the alignment data since the unique alignment data is stored in the discrete tuner modules. Not only is the alignment data for tuners used in different regions in the world different, but alignment data used in each tuner is typically unique. The reasons why each tune contain different alignment data includes layout differences and component tolerance variations. The layout differences in the alignment data compensate for particularities of the printed circuit board for each television set. The component tolerance variations in the alignment data compensate for component value variations. Storing various alignment data in the chassis nonvolatile memory for each tuner is time consuming and complicates the manufacturing processes.

The tuner 108 of the television control system 100 shown in Fig. 1 that utilizes electronic alignment data is input into the television receiver at the time of manufacture. However, alignment data used for the tuner functions are stored in the chassis nonvolatile memory 104 and retrieved by the microprocessor 102. As such, the microprocessor 102 has to perform the functions associated with the retrieval of the alignment data. During manufacture of the television set, the different components are assembled.

The alignment data is not stored in the tuner, but is instead contained in the chassis nonvolatile memory 104 at the time of component assembly. The alignment data that pertains to a particular tuner is separately programmed into the chassis nonvolatile memory during component assembly. As such, each tuner that is shipped from the location of tuner manufacture to the location of component assembly has to contain the tuner in addition to alignment data that

3

is a separate entity from the tuner. During assembly, not only is the tuner installed into the television, but the alignment data has to be correctly stored into the chassis nonvolatile memory. If the alignment data is incorrectly entered into the chassis nonvolatile memory, then the tuner will not function properly.

5 If a television receiver is not tuning properly, either the tuner module 108 is defective or the alignment data transmitted to the tuner 108 from the microprocessor is defective. A repair person fixing such a tuning malfunction could not be certain that replacing the tuner module 108 itself would correct the tuner deficiency because the malfunction in the alignment data could originate in
10 the microprocessor, the chassis nonvolatile memory 104, or the tuner itself.

Therefore, a need exists in the art for a tuner having a non-volatile memory that contains its own alignment data.

SUMMARY OF THE INVENTION

15 The present invention relates to tuner devices. More particularly, a tuner comprises a phase-locked loop circuit, D/A converter circuits, and a non-volatile memory. The disadvantages associated with the prior art are overcome by a television control system that exhibits modular tuner compatibility. Specifically, electronic alignment data for a tuner module of a television receiver is stored in
20 non-volatile memory that is located within the tuner module. The microprocessor within the television receiver communicates a tuning command to the tuner module that contains the desired television channel. The tuner module accesses the non-volatile memory for the alignment data corresponding with the desired television channel and performs the alignment.

BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

30 FIG. 1A shows a block diagram of one embodiment of a television receiver including a tuner;

FIG. 1 shown a block diagram of one embodiment of tuner;

FIG. 2 shows a block diagram of another embodiment of tuner;

FIG. 2A depicts a block diagram of a television receiver having a television
35 control system of the present invention.

FIG. 3 shows a block diagram of one embodiment of PLL circuit;

FIG. 4 shows a block diagram of another embodiment of PLL circuit; and

FIG. 5 discloses one embodiment of software for an address decoder;

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

DETAILED DESCRIPTION

5 After considering the following description, those skilled in the art will clearly realize that the teachings of this invention can be readily utilized in television receivers. This disclosure involves a television tuner in which a re-writable memory is associated with a PLL integrated circuit to store alignment data within the tuner.

10 FIG. 1A shows one embodiment of a television receiver 150. The television receiver 150 includes a television control system 100, a radio frequency (RF) source 110, and a screen 156. The television control system 100 includes a tuner module 108 and a microprocessor 102. Received television
15 signals from an RF source 110, a cable, a digital video disk device, a VCR, a computer, or any known device by which televisions receive signals are displayed on the television screen 156.

The tuner module 108 selects the RF signal corresponding to a desired television channel selected from a plurality of channel locations in a frequency band provided by the RF source 110 (e.g., antenna, cable feed, or the like). The
20 RF signals associated with television channels are analog and digital television signals. The analog television signal may comprise a conventional National Television Standard Committee (NTSC) modulated signal within the United States. The digital television signal may comprise a Vestigial Sideband (VSB) modulated signal in compliance with the Advanced Television Systems
25 Committee (ATSC) standard A/53, for example, a high definition television (HDTV) signal. The system described herein could also be configured to function with other formats, such as European, by appropriate changes in the television control system 100.

The tuner module 108 selects the desired television channel to be
30 displayed on the screen 156 pursuant to a tuning command generated by the microprocessor 102. The microprocessor 102 is coupled to the tuner module 108 via the communication bus 106. In this disclosure, the communication bus may be an inter-integrated circuit (I2C) bus, a 3-wire bus, or any known type of communication bus. In response to the tuning command generated by the
35 microprocessor 102, the tuner module 108 searches the memory unit 203 for the alignment data corresponding with the desired television channel. The memory unit 203 comprises nonvolatile memory. In this disclosure, nonvolatile memory may include, but is not limited to, read only memory (ROM) or

programmable ROM (PROM), the latter of which may be subdivided into electrically programmable ROM (EPROM), electrically erasable programmable ROM (EEPROM), and one-time PROM (OTPROM). The alignment data comprises data necessary to compensate for mismatches in the preset alignment of various sensitive components within the tuner module 108, such as tuning coils.

In this manner, the tuner module 108 is electronically aligned to provide the best overall tuning performance for the desired television channel. The tuner module 108 contains all the necessary data for tuner alignment thus dispensing with the need to embed tuner specific routines for selecting and communicating alignment data from the microprocessor 102 to the tuner module 108. As such, the tuner module 108 is a discrete component within the television control system 100, which allows, for example, the replacement of the tuner module 108 in the field without changing the television control system 100, specifically, the microprocessor 102.

In the embodiment of television control system 100 shown in Fig. 2, a re-writable memory, e.g. PLL nonvolatile memory 203, is located internal to the tuner module 108 and is electrically connected to the PLL integrated circuit 112. The PLL nonvolatile memory 203 stores alignment data and can store additional data relating to the operation of the PLL nonvolatile memory. By storing the alignment data in the PLL nonvolatile memory in the tuner module 108, the alignment data can be selected depending upon the specifics of the tuner to be used in the television control system 100. Variations in the alignment data between different tuners can result from layout differences that reflect printed circuit board distinctions, component tolerances that reflect component value variations, and the broadcast characteristics in the region of the world that the tuner is being used. Each tuner contains specific alignment data. The alignment data is entered into a discrete tuner module 108 at time of manufacture by the manufacturer, distributor, or other person. The alignment data remains with the tuner module 108, and can be transferred between different television sets by transfer of the tuner module.

The PLL 112 utilizes a PLL oscillator 208 and a reference oscillator (not shown). The PLL oscillator 208 can be controlled to operate over the desired frequency range of the PLL integrated circuit. The reference oscillator is, e.g., a crystal oscillator that is used to steer the PLL frequency generated by the PLL oscillator. During operation, the frequency of the PLL oscillator 208 is compared to the frequency of the reference oscillator. If a comparator circuit notes that the PLL signal is leading the signal generated by the reference oscillator, the frequency of the PLL signal generated by the PLL oscillator 208 is decreased. If

the comparator circuit notes that the PLL signal is lagging the signal generated by the reference oscillator, the frequency of the PLL signal generated by the PLL oscillator 208 is increased. The PLL circuits can be combined with the local oscillator, mixer circuits, and a D/A converter into a single tuner integrated circuit. Also, a similar PLL circuit that includes nonvolatile memory storage can be used in a double-conversion tuner architecture, with memory included in either or both PLL circuits. One system that utilizes a phase-locked loop is disclosed in U.S. Patent 5,828,266, issued October 28, 1998 to Couet, entitled "APPARATUS AND METHODS FOR SETTING UP A TUNING FREQUENCY OF A PLL DEMODULATOR THAT COMPENSATES FOR DISPERSION AND AGING EFFECTS OF AN ASSOCIATED CERAMIC RESONATOR FREQUENCY REFERENCE" (incorporated herein by reference).

The tuning algorithm can be simplified because the alignment data in the tuner is recalled in response to the frequency programmed in the PLL nonvolatile memory 203. In addition, microprocessor intervention for alignments will not be necessary once values are stored in the PLL nonvolatile memory. The cost and space requirements of providing a separate memory device, and its associated interface circuitry, when the television control system 100 is used in a different location (country, etc.) or with a different tuner to cause the alignment data in the EEPROM 104 to correspond to the tuner specifics can be limited.

FIG. 2A depicts a block diagram of another embodiment of television receiver 150 incorporating the television control system 100 of the present invention. The television receiver 150 comprises a tuner module 108, a microprocessor 102, an RF source 110, an IF module 212, and a demodulation module 214. The tuner module 108 selects the RF signal corresponding with the desired television channel from the RF source 110. The desired television channel is communicated to the microprocessor 102 via user input. The microprocessor 102 sends a tuner command signal over the communication bus to the tuner module 108. The tuner module 108 performs electronic alignment and couples the RF signal corresponding with the desired television channel to the IF module 212. The IF module 212 and the demodulation module 214, in a well known manner, convert the RF signal to an IF signal and demodulate the IF signal for display of the television information.

The tuner module 108 comprises a downconverter 202, the PLL 112, an address decoder 210, a memory unit 203, and a digital-to-analog (D/A) converter 204. In response to user selection of the desired television channel, the microprocessor 102 communicates the tuning command via the communication bus 108 to the PLL 112. The PLL 112 couples the tuning command to the

address decoder 210. The address decoder 210 determines the address in the memory unit 203 where the alignment data for the desired television channel resides. The address decoder 210 retrieves the alignment data from the memory unit 203 and couples the data to the PLL 112. The PLL 112 causes the PLL oscillator 208 to retrieve suitable alignment data from memory to select the desired television channel from the plurality of channels in the received RF signal. The electronic alignment allows the other frequency sensitive circuits of the tuner to be modified.

The PLL 112 comprises a digital integrated circuit (IC) PLL. Therefore, the D/A converter 204 converts the digital alignment data retrieved from the memory to analog voltages to be input to the downconverter 202. The downconverter 202 heterodynes the RF signal received by the RF source 110 with the frequency tone generated by the PLL 112 to output an RF signal corresponding to the desired television channel. The downconverters frequency selective circuits and other circuits are aligned with the D/A converter voltage outputs. One system that provides such tracking is described in U.S. Patent No. 5,678,211, issued October 14, 1997 to D. Badger, entitled "TELEVISION TUNING APPARATUS" (Incorporated herein by Reference).

FIGs. 3 and 4 show two exemplary block diagram embodiments of a PLL integrated circuit 207 that are most preferably contained in the tuner 108, that most preferably comprises an integrated circuit. In each one of the embodiments, the PLL nonvolatile memory 203, internal to a PLL integrated circuit, is implemented to store the alignment data for each Digital to Analog Converter (DAC).

The PLL integrated circuit includes a DAC section 301a, a communication bus section 301b, and a PLL section 301c. The communication bus section includes a shift register 303 and a communication bus receiver 302 that connects to the communication bus 106 (shown in FIG. 1). The PLL section 301c comprises a latch 330, a PLL programmable divider 302, and an address decoder 334. The DAC section comprises a plurality of DAC components 306a, 306b, and 306c, the PLL nonvolatile memory 203, a plurality of latches 312a to 312d, an communication decoder 308, and a shift register 310.

Each DAC component 306a, 306b, and 306c includes a respective converter 318a, 318b, 318c, a respective amplifier 320a, 320b, and 320c, and a respective input. Though three DAC components 306a, 306b, and 306c are shown, as many DAC converters as may be utilized to comply with the memory requirements are used.

A PLL frequency tuning command that is sent to the PLL module 207 via the communication bus 106 will be decoded to address a memory location in the PLL nonvolatile memory 203 that corresponds to the stored alignment data. The alignment data is then retrieved from the PLL nonvolatile memory 203. The
 5 retrieved alignment data is sent to the corresponding DAC, whose output is amplified by the respective amplifier 320a, 320b, or 320c to produce an alignment voltage. Such an alignment voltage is automatically retrieved whenever the microprocessor commands the tuner to tune a particular RF channel.

10 The frequency of PLL circuit operation is set in part by the PLL Programmable Divider 332. An exemplary frequency division ratio (N) is given by an equation such as:

$$N = 16384XN_{14} + 8192XN_{13} + \dots + 4XN_2 + 2X N_1 + N_0$$

15 The address decoder 334 is a logic circuit that is programmed to divide the selected frequency range of the PLL circuit for the application into a number of alignment ranges. These alignment ranges need not be equal in frequency span. The highest-resolution alignment occurs when each frequency to be tuned is assigned an address where alignment data will be stored.

20 The address decoder 334 takes the digital frequency programming information sent to PLL programmable divider 332 and creates addresses that are used to access PLL nonvolatile memory locations. The logic of the address decoder is designed to access alignment data for a plurality of frequency channels that can be tuned, or can be designed to access alignment information for each channel tuned. The address decoder can be configured in software, e.g.
 25 a microprocessor running a software program, or alternatively in hardware, e.g. a series of logic gates arranged to provide the logic behind the address decoder. There are a wide variety of possible digital or analog configurations that are possible for the address decoder. However, it several exemplary embodiments are provided.

30 The address decoder 334 takes the digital frequency word commanded through the communication bus, and generates an address control word that is used to access alignment data in the PLL nonvolatile memory that is in-turn provided to the D/A circuits.

35 Many different embodiments of address decoder 334 may be applied to the tuner 108. The address decoder, for example, may utilize a software program or alternatively may utilize a set of logic gates. FIG. 5 shows one embodiment of address decoder method 500 that is performed by software. The contents used in this example are for an NTSC tuner system that starts tuning

channel #2 (having a 101MHz LO frequency), uses a 62.5 kHz PLL step size, and uses three D/A converter circuits for electronic alignment.

The method 5000 starts with block 5002 in which the microprocessor sends a PLL divider ratio to the PLL integrated circuit 112. The divider ratio is a digital word that sets the frequency of the tuner. The PLL divider ratio is stored in the PLL integrated circuit 112.

The method 5000 continues to block 5004 in which the channel divider ratio digital word is subtracted from the PLL divider ratio digital word to derive the commanded tuning frequency. This constant, for example, is 065H (Hexadecimal) for channel #2 LO frequency of 101 MHz and a 62.6 PLL step size.

The method 5000 continues to block 5006 in which the bits of the commanded tuning frequency derived in block 5004 are shifted to the right by 5 bits to effect division by 16. In block 5008 the results of block 5006 are shifted to the left by two bits to effect multiplication by 4. The least significant 5 bits are shifted out and are not recovered, leaving the lowest three bits of the digital word cleared. This clearing reduces the magnitude of the number, and leaves room to increment the address to access the three D/A converter circuits.

The method 500 continues to block 5010 in which the initial value of N is set to 1. The purpose of N is to derive a set number that the method 5000 loops through blocks 5014, 5016, 5016, and 5018, e.g. three. In block 5012, the nonvolatile memory is accessed that contains the alignment data having the address derived in block 5008. In block 5014, the digital word that is output by the nonvolatile memory 203 in response to the memory access in block 5012 is latched into the D/A converter at the location corresponding to N=1.

The address word N is incremented by 1 in block 5016. Therefore, the second time that the loop containing blocks 5012, 5014, 5016, and 5016 are run, the value of N equals 2. The third time, N=3. Following decision block 5018, provided that N is less than 4, the method 500 continues to block 5012. The decision block 5018 continues within this loop formed by blocks 5012, 5014, 5016, and 5016 until N equals 4. Following decision block 5018 when N=4, the method 500 terminates.

Another embodiment of address generator is provided in U.S. Patent No. 5,724,546 that issued April 21, 1998 to Devin, entitled "METHOD AND DEVICE FOR ADDRESS DECODING IN AN INTEGRATED CIRCUIT MEMEORY" (Incorporated herein by Reference).

There are two embodiments of addressing schemes that may be performed by the address decoder, regardless of the configuration of the address

decoder. Any type of known addressing scheme may be utilized while remaining within the scope of the address decoder. The first addressing scheme is a 1 to 1 addressing scheme, in which each actual channel to be used corresponds to a discrete alignment channel. For example, if there are envisioned to be 181 actual channels (i.e. cable channels + VHF channels + UHF channels) that a particular tuner for a television system can tune, then a 1 to 1 addressing scheme requires the address decoder can individually address 181 alignment channels.

Another type of addressing scheme by the address decoder involves the use of fewer alignment channels than the number of actual channels. The address decoder uses an interpolation process to obtain the actual channels in response to the alignment channels. For example, assume that there are 29 alignment channels that can be used to derive the actual channels. A plurality, e.g. five, of actual channels may have frequencies that are contained between one adjacent pair of alignment channels. One actual channel may be aligned at twenty percent of the difference from the lower alignment channel to the higher alignment channel. The next actual channel is aligned at forty percent of the distance from the lower alignment channel to the upper alignment channel, etc. When the first channel is selected, the address decoder performs a piece-wise linear interpolation of twenty percent above the lower alignment channel to the adjacent alignment channel.

There are certain nonlinearities between adjacent alignment channels. For example, the distance between alignment channels at one end of the alignment channel spectra may not match the distance between alignment channels at another end of the alignment channel spectra. Therefore, the address decoder may adjust the interpolation process so the more actual channels are interspersed between adjacent ones of the alignment channels at the more sparse frequencies than at the more dense frequencies.

The PLL nonvolatile memory 203 can be programmed/ reprogrammed by transferring the data via the communication bus and stores it in the latch circuits on chip. Alternatively, the data transmitted over the communication bus may be stored directly onto the PLL nonvolatile memory 203 without the use of latches. The communication decoder 308 will be configured according to command received from the communication bus receiver, to send the Write command to the appropriate PLL nonvolatile memory 203 so that the data can be stored.

The elements the PLL Section 301c operates as part of a larger PLL loop. The elements within the DAC section 301a operate for the electronic alignment function. The communication bus receiver block 302 is common to both.

In FIG. 3, a plurality of PLL nonvolatile memorys 203a, 203b, 203c, and 203d, internal to an PLL integrated circuit, are associated with respective D/A converters 318a, 318b, or 318c and the Reference Voltage circuit 316. This multiple PLL nonvolatile memory configuration results in the use of multiple, individual PLL nonvolatile memories 203a, 203b, and 203c. In FIG. 4, a single, larger PLL nonvolatile memory 203 is used. A more complex address algorithm is used in the FIG. 4 embodiment of one PLL nonvolatile memory.

Although a PLL nonvolatile memory is the memory circuit described in the PLL nonvolatile memory 203, 203a, 203b, 203c, and 203d, any type of known non-volatile re-writable memory circuit that can be positioned on a PLL integrated circuit for storing tuning alignment data is within the scope of the term PLL nonvolatile memory.

The communication bus receiver 302 includes an interface between the communication bus 106. The interface is controlled by the microprocessor 102 on the chassis 154 and the circuitry of the PLL element 112. The communication bus receiver 302 generates data, clock timing, and control signals for use within a PLL integrated circuit 203. The communication bus receiver 302 can be operated bi-directionally. That is, signals taken from the PLL element 112 can also be formatted, and transmitted over the communication bus for external use.

Shift register 303 formats the serial data taken from the communication Bus Receiver 302 into a parallel data word that determines the PLL frequency to which the PLL element 112 will be tuned. The PLL frequency relates to the channel selected, the countries that the tuner is used in, and other such factors. Latch 330 holds the digital word that determines PLL frequency. The hold timing of the latch 330 is controlled by a signal from the communication bus receiver.

The PLL programmable divider 332 uses the digital frequency control word to set a divide ratio that determines the frequency of operation of the PLL, and determines the frequency to be tuned in response to the input from the PLL circuit.

The shift register 310 takes the serial data from the communication bus receiver 302 and formats it into a parallel data word that is used to write alignment data into the PLL nonvolatile memory 203.

Latches 312a to 312d hold the digital word for electronic alignment to be written into the PLL nonvolatile memory 223. The latches 312a to 312d are not necessary if the PLL nonvolatile memory 223 interfaces directly with the shift register 310.

The communication decoder 308 takes commands sent through the communication decoder and generates control signals. One set of signals controls the timing for latches 312a to 312d, to store alignment data. A second set of signals commands the PLL nonvolatile memory 203 to receive and store data.

PLL nonvolatile memory 203 stores digital alignment information words in an addressable format. The correct alignment digital word is accessed according to the address from the address decoder 334, and is sent to the converters 318a to 318c. Stored information may also include D/A voltage step-size information, the commanded output voltage, and other information used by the D/A circuit to set the output voltage.

D/A converters 318a to 318c take the digital words recalled from the PLL nonvolatile memory 203 and translates them into an analog voltages that are used to control tuner alignments and other functions in the tuner. Amplifiers 320a to 320c amplify the analog voltages output by the respective D/A converters 318a to 318c to a range of voltages suitable to control tuner circuits. Input tuning voltage VTUN, generated by another area of the PLL circuit (not shown) in a usual manner, is summed into the output voltages, of the D/A converters 318a to 318c.

Reference voltage indicates circuit that generates a precise voltage for use by the D/A and other circuits within the PLL element 112. This voltage can be aligned similarly to the D/A circuits 306 if desired.

The alignment data in above embodiments is contained in nonvolatile memory stored in the tuner 108. As such, when a tuner module is transported, the alignment data is transported therein. The installation of the tuner containing the alignment data obviates further alignment data input instead of the alignment data having to be programmed into a distinct circuit component follower assembly of the components in the television receiver. If a tuner is malfunctioning, a new tuner having its alignment data is inserted into the malfunctioning television receiver. Once again, the repair person does not have to program separate alignment data into the nonvolatile memory 104 such as, for example, a chassis EEPROM.

Although various embodiments that incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

CLAIMS

1. A tuner comprising:
5 A phase-locked loop circuit;
 a nonvolatile memory that stores alignment data,
2. The tuner of claim 1, wherein the alignment data can be utilized by the
10 phase-locked loop.
3. The tuner of claim 1, wherein the nonvolatile memory is an EEPROM.
4. The tuner of claim 1, wherein the tuner is used in a television receiver.
- 15 5. The tuner of claim 4, wherein the tuner is coupled to a microprocessor, the
 microprocessor is contained in the television receiver.
- 20 6. The tuner of claim 1, wherein the phase-locked loop circuit is a phase-locked
 loop integrated circuit.
- 25 7. The tuner of claim 6, wherein the re-writable memory is integrated in the
 phase-locked loop integrated circuit.
8. The tuner of claim 6, wherein the re-writable memory is coupled to, but not
 integrated in, the phase-locked loop integrated circuit.
9. The tuner of claim 1, further comprising a D/A converter.
10. The tuner of claim 1, wherein the tuner further comprises an address
30 decoder.
11. The tuner of claim 10, wherein the address decoder includes a 1 to 1 actual
 channel to alignment channel addressing scheme.
- 35 12. The tuner of claim 10, wherein the address decoder includes a plurality to 1
 actual channel to alignment channel addressing scheme.

14

13. The tuner of claim 10, wherein the address decoder is implemented using software.

14. The tuner of claim 10, wherein the address decoder is implemented using hardware.

15. A television receiver comprising:

a microprocessor;

a first nonvolatile memory coupled to the microprocessor;

a tuner coupled to the microprocessor, the tuner comprising:

a phase-locked loop circuit coupled to the microprocessor, and

a second non-volatile memory.

16. The television receiver of claim 15, wherein the second nonvolatile memory is an EEPROM that can store alignment data.

17. A television control system for tuning a desired television signal, which comprises:

a radio frequency (RF) source for receiving an RF signal associated with television channels;

a tuner module, coupled to said RF source, for selecting the desired television signal from said RF signal, said tuner module having a memory unit, wherein said memory unit contains alignment data for said tuner module; and

a microprocessor, coupled to said tuner module, for communicating a tuning command corresponding to the desired television signal to said tuner module.

18. The television control system of claim 17 wherein said tuner module comprises:

a downconverter, coupled to said RF source, for selecting a RF signal corresponding to the desired television signal;

a phase-locked loop (PLL), coupled to said microprocessor and said downconverter, for receiving said tuning command and generating a frequency tone for output; and

an address decoder, coupled to said PLL and said memory unit, wherein said address decoder retrieves said alignment data from a memory location in said memory unit for the desired television signal.

15

19. The television control system of claim 17 wherein said microprocessor is coupled to said tuner module via an inter-integrated circuit bus.

20. The television control system of claim 17 wherein said memory unit comprises an electrically erasable programmable read only memory (EEPROM).

21. A television receiver for receiving a desired television signal, which comprises:

a radio frequency (RF) source for receiving an RF signal associated with television channels;

a tuner module, coupled to said RF source, for generating an RF signal corresponding to the desired television signal, said tuner module having a memory unit, wherein said memory unit contains alignment data for said tuner module;

an intermediate frequency (IF) module, coupled to said tuner module, for converting said RF signal corresponding with the desired television signal to an IF signal; and

a demodulation module, coupled to said IF module, for demodulation and display of the television information of the desired television signal.

22. The television receiver of claim 21 wherein said tuner module comprises:

a downconverter, coupled to said RF source, for selecting said RF signal corresponding to the desired television signal;

a phase-locked loop (PLL), coupled to said microprocessor and said downconverter, for generating a frequency tone for output; and

an address decoder, coupled to said PLL and said memory unit, wherein said address decoder retrieves said alignment data from a memory location in said memory unit for the desired television signal.

23. The television receiver of claim 21 wherein said said microprocessor is coupled to said tuner module via an inter-integrated circuit bus.

24. The television receiver of claim 21 wherein said memory unit comprises an electrically erasable programmable read only memory (EEPROM).

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22583 A3

(51) International Patent Classification: **H03J 1/00**

(74) Agents: **TRIPOLI, Joseph, S. et al.**; Thomson Multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).

(21) International Application Number: PCT/US00/26062

(22) International Filing Date:
22 September 2000 (22.09.2000)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/155,452 22 September 1999 (22.09.1999) US

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **THOMSON LICENSING S.A.** [US/US]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (US).

(72) Inventors; and

Published:


(75) Inventors/Applicants (*for US only*): **HALL, Edward, Allen** [US/US]; 868 Desert Wind Court, Carmel, IN 46032 (US). **ALPAIWALLA, Feroz, Kaiki** [US/US]; 1641 Charter Oak Circle, Indianapolis, IN 46260 (US).

— with international search report

(88) Date of publication of the international search report:
24 January 2002

[Continued on next page]

(54) Title: PLL WITH MEMORY FOR ELECTRONIC ALIGNMENTS

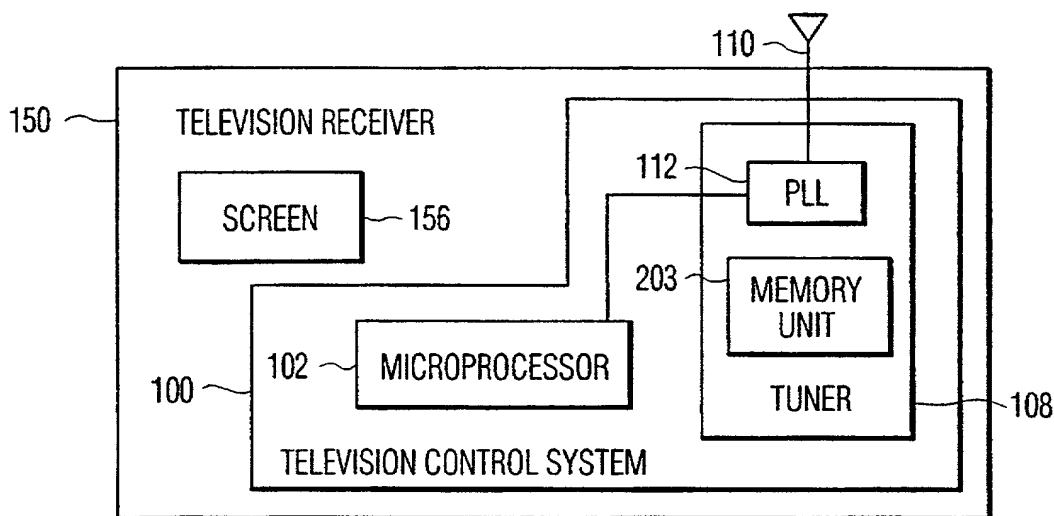

(57) Abstract: A television control system with modular tuner compatibility comprises a tuner module coupled to a microprocessor via a communication bus. The tuner module includes a memory unit having tuner alignment data. The microprocessor communicates a tuning command via the communication bus to the tuner module and the tuner module locates the tuner alignment data corresponding to a desired television signal in the memory unit for performing electronic tuner alignment.

20010229 00259001

WO 01/22583 A3

1/5

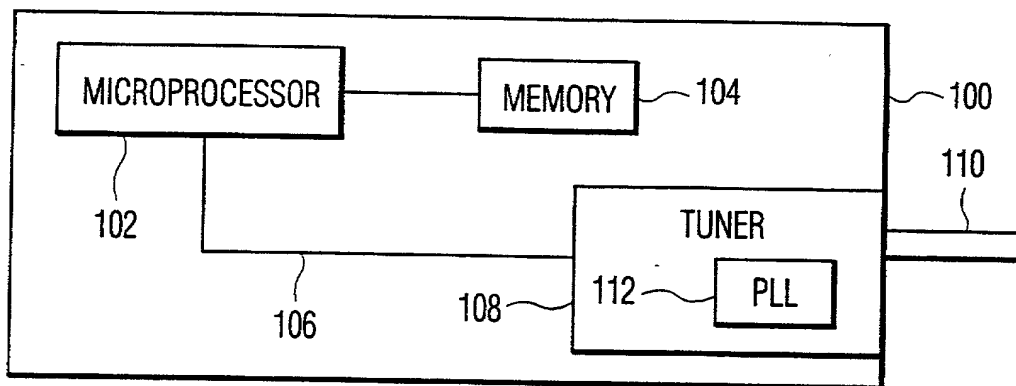


FIG. 1

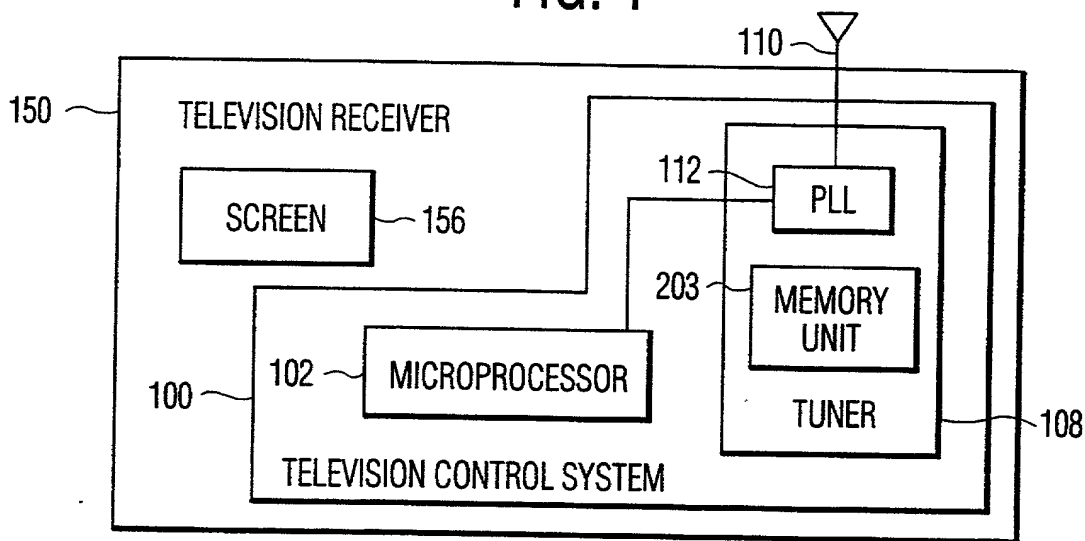


FIG. 1A

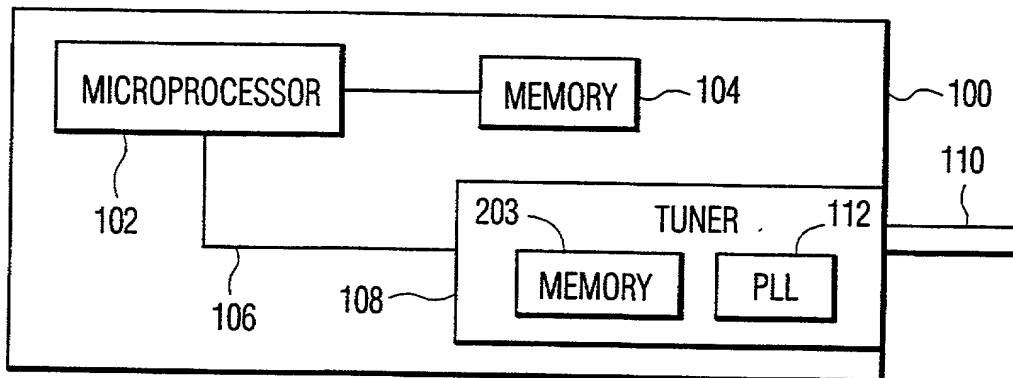


FIG. 2

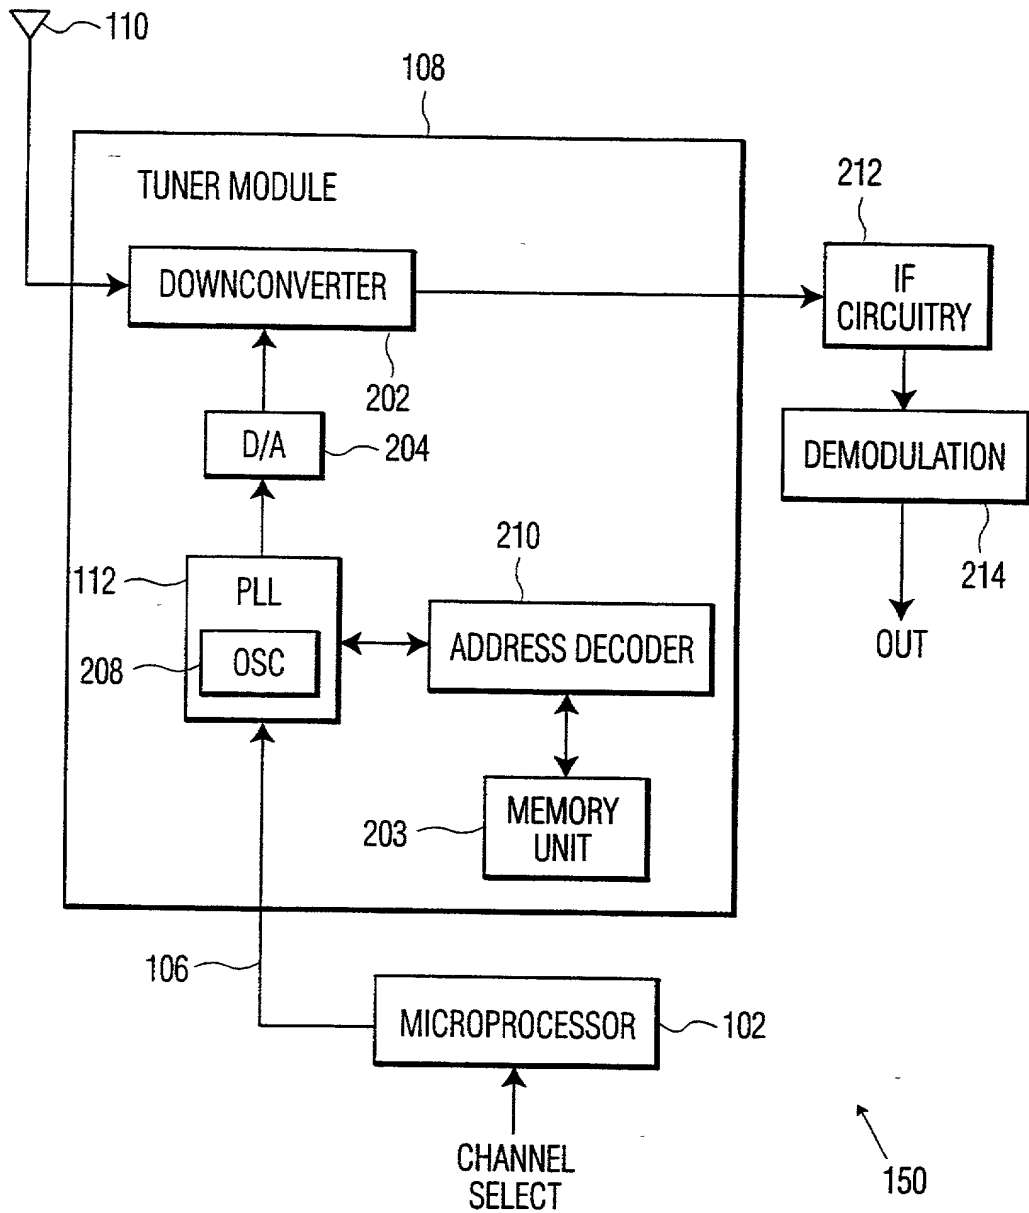


FIG. 2A

3/5

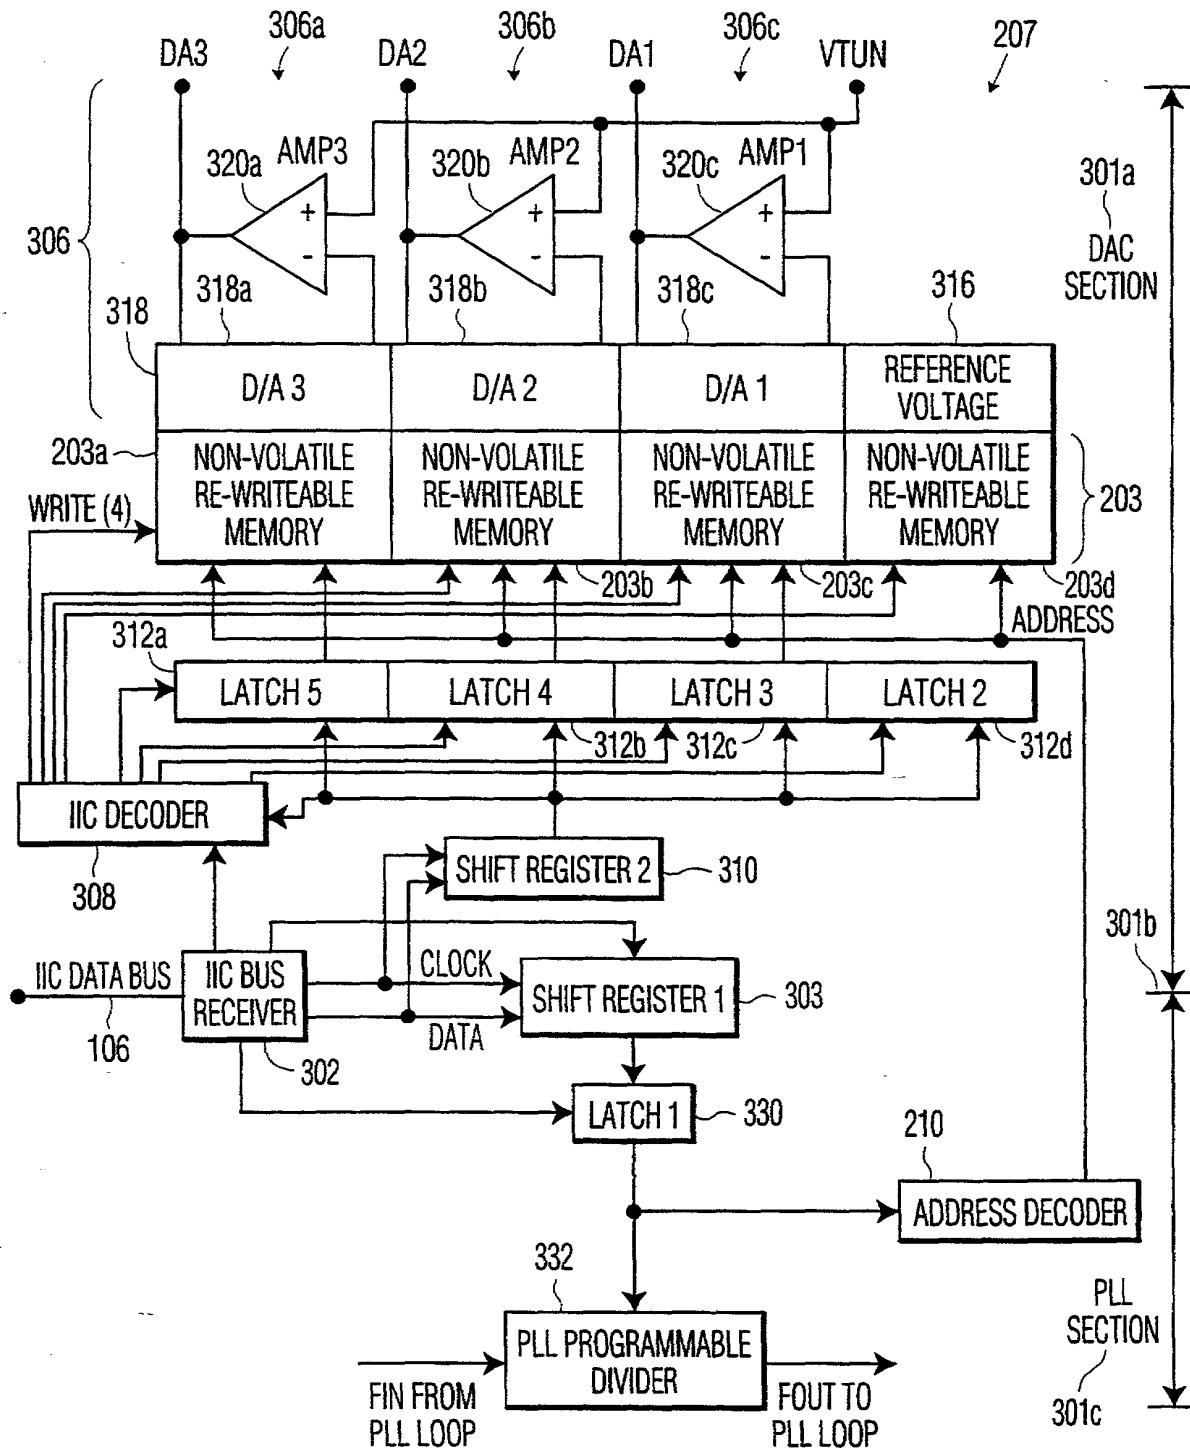


FIG. 3



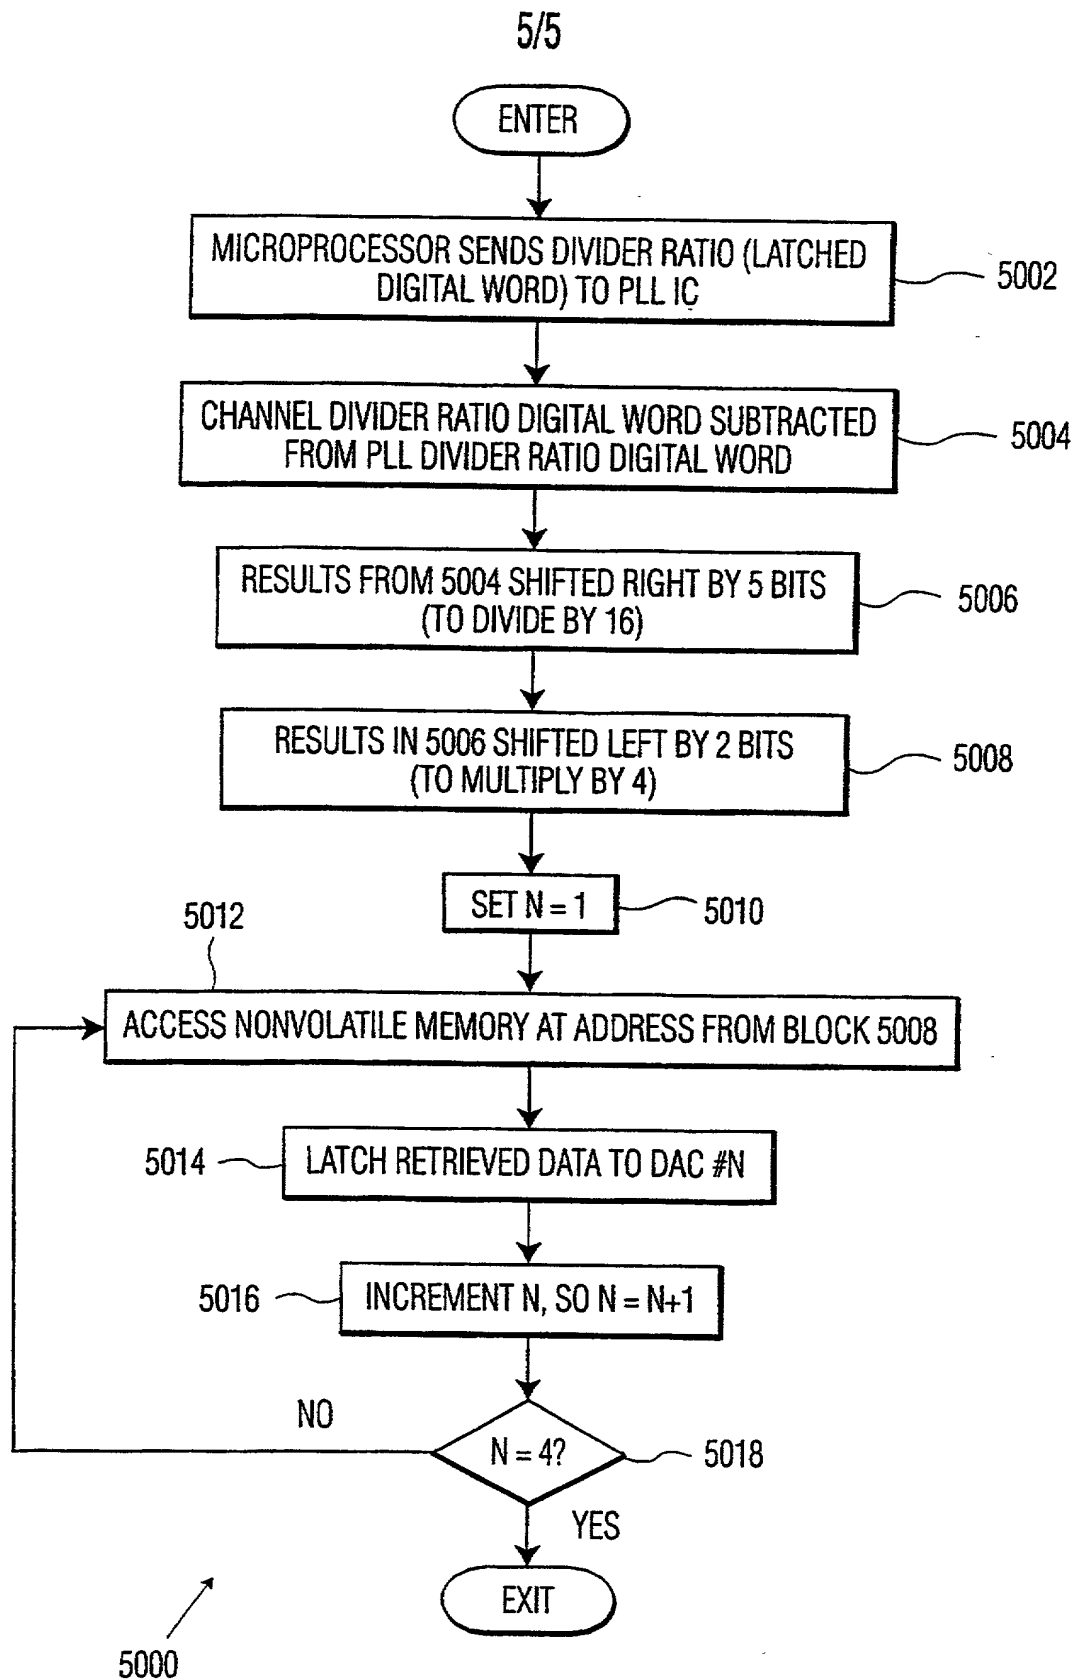


FIG. 5

SUBSTITUTE SHEET (RULE 26)

EXPRESS EL90732/492 US

Please type a plus sign (+) inside this box →



PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☐ Declaration Submitted With Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number

RCA 89762

First Named Inventor

Edward Allen Hall et al

COMPLETE IF KNOWN

Application Number

/

Filing Date

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PLL WITH MEMORY FOR ELECTRONIC ALIGNMENTS

the specification of which

(Title of the Invention)

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY)September
22,2000

as United States Application Number or PCT International

Application Number

PCT/US00/26062

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY) Country	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
60/155,452	September 22, 1999	

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

10059600 "0220" 20065007

Please type a plus sign (+) inside this box → +

PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to: ☐ Customer Number OR ☐ Correspondence address below

Name			JOSEPH S. TRIPOLI		
Address			THOMSON MULTIMEDIA LICENSING INC.		
Address			PO Box 5312		
City		State	ZIP		
PRINCETON		NJ	08543-5312		
Country	Telephone		Fax		
USA	609-734-9404		(609) 734 - 9700		

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name	1-00 EDWARD ALLEN	Family Name or Surname	HALL
-------------------	----------------------	-------------------------------	------

Inventor's Signature		<i>Edward Allen Hall</i>		Date	2/18/2002
Residence: City	State	Country	Citizenship		
FORT WAYNE	INDIANA	US	US <i>USX</i>		

Mailing Address

Mailing Address			
11522 Brigadoon Court			
City	State	ZIP	Country
FORT WAYNE	INDIANA	46814	US

NAME OF SECOND INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name	FEROZ KAIKI	Family Name or Surname	ALPAIWALLA
-------------------	-------------	-------------------------------	------------

Inventor's Signature				Date	
Residence: City	State	Country	Citizenship		
INDIANAPOLIS	IN	US	US		

Mailing Address

Mailing Address			
1661 Charter Oak Circle			
City	State	ZIP	Country
INDIANAPOLIS	INDIANA	46260	US

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

20020218 00265901

Please type a plus sign (+) inside this box →

+

PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☐ OR ☐ Correspondence address below

Name	JOSEPH S. TRIPOLI		
Address	THOMSON MULTIMEDIA LICENSING INC.		
Address	PO Box 5312		
City	State	ZIP	
PRINCETON	NJ	08543-5312	
Country	Telephone	Fax	
USA	609-734-9404	(609) 734 - 9700	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name	EDWARD ALLEN	Family Name or Surname	HAEL
-------------------	--------------	-------------------------------	------

Inventor's Signature	Date		
Residence: City	State	Country	Citizenship
FORT WAYNE	INDIANA	US	US

Mailing Address			
11522 Brigadoon Court			
City	State	ZIP	Country
FORT WAYNE	INDIANA	46814	US

NAME OF SECOND INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name	2-00 FEROZ KAIKI	Family Name or Surname	ALPAIWALLA
-------------------	---------------------	-------------------------------	------------

Inventor's Signature	Feroz Kaiki Alpaivalla	Date	FEB. 18, 2002
-----------------------------	------------------------	-------------	---------------

Residence: City	State	Country	Citizenship
INDIANAPOLIS	IN	US	USX

Mailing Address			
1661 Charter Oak Circle 3316 HULINGS COURT			
City	State	ZIP	Country
PLANO INDIANAPOLIS	TX INDIANA	75023 46260	US

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.